



# TRANS-TIER

## Series TT5800

EDWARDS VERTICAL MAST ATTACHMENT FOR SKID STEER LOADERS



**STACK BINS**

**LOAD TRUCKS**

**HANDLE BEE HIVES**

**LIFT LOADS EASILY**

**TRANSPORT PRODUCE TO  
LOADING AREA**

The TRANS-TIER is made from high quality materials. Sealed ball bearings support the fork carriage. The slide channels are a special section rolled from high carbon steel. Hard chromed rod is used in all hydraulic cylinders. A rugged mounting bracket attaches the TRANS-TIER quickly and easily to the loader frame. Available 120 and 144 inch lifting heights.



**EDWARDS**  
EQUIPMENT COMPANY

4312 Main Street Union Gap WA 98903

509-248-1770 800-452-5151

Fax: 509-248-9721

Web Site: [www.edwards-equip.com](http://www.edwards-equip.com)

E-mail: [sales@edwards-equip.com](mailto:sales@edwards-equip.com)

Agricultural

MANUFACTURES

industrial


**EDWARDS****TRANS-TIER****ON SKID STEER LOADERS****Series TT5800  
SPECIFICATIONS**

**FORKS:** Forks are made from 1 1/4 x 4 heat treated alloy steel. Standard length is 46". Standard carriage width is 29 inches. Fork spacing is adjustable. Other fork lengths and carriage widths are available on special order.

**MAST TYPE:** Single stage lift.

**SIDESHIFT (Optional):** Three inches each side of mast center.

**HOLDDOWN:** Available as an optional attachment.

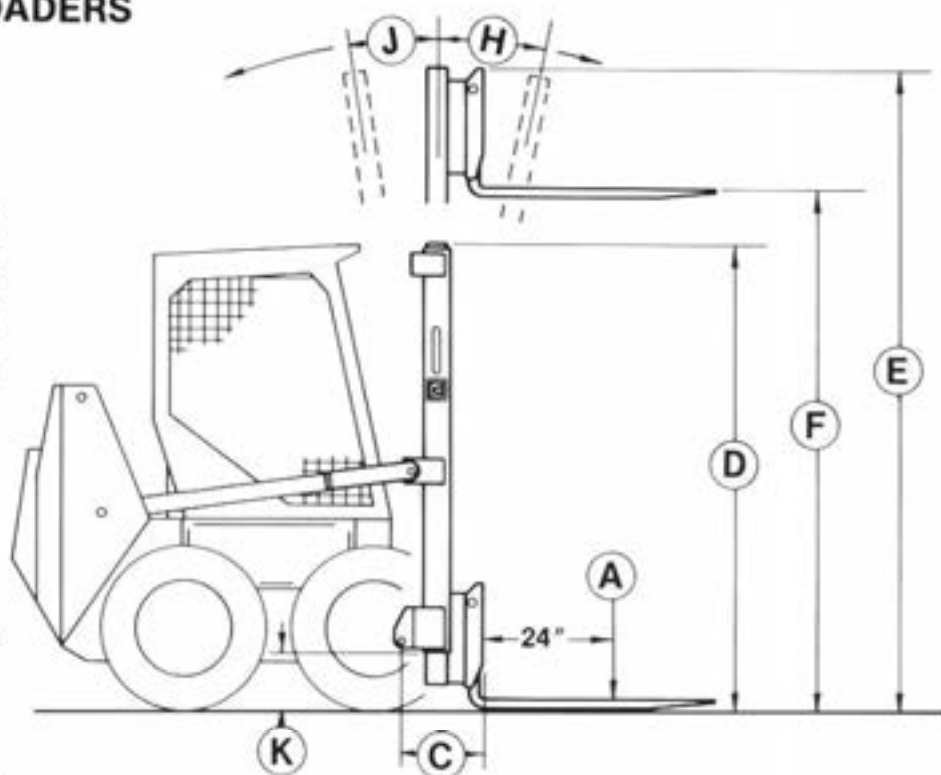

Specifications and design subject to change without notice.

MODEL NUMBER	TT5860	TT5872	TT5884	TT5896	TT58108	TT58120	TT58144
A — Lifting Capacity — Lbs. at 24 Inches *	2000						
C — Reach With Sideshift	18" 21"						
D — Overall Height Mast Lowered	54"	60"	66"	72"	78"	84"	96"
E — Overall Height Mast Raised	84"	96"	108"	120"	132"	144"	168"
F — Maximum Lifting Height	60"	72"	84"	96"	108"	120"	144"
H — Degrees Tilt Forward	8°						
J — Degrees Tilt Rearward	8°						
K — Ground Clearance	8"						
Approximate Shipping Weight — Pounds	742	872	902	932	962	987	1052

\* Mast lifting capacity only. Does not indicate tractor carrying capacity.